

FORM PTO-1390 (REV. 5-99)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 67190/978621	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
				097508396	
INTERNATIONAL APPLICATION NO. PCT/DE98/02692		INTERNATIONAL FILING DATE (4.09.98) 4 September 1998		PRIORITY DATES CLAIMED (10.09.97) 10 September 1997	
TITLE OF INVENTION METHOD AND CONFIGURATION FOR TESTING DIGITAL PROTECTION DEVICES					
APPLICANT(S) FOR DO/EO/US KAISER, Steffen and WINTER, Wilhelm					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.					
2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.					
3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay applicable time limit set in 35 U.S.C. examination until the expiration of the 371(b) and PCT Articles 22 and 39(1).					
4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.					
5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))					
a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.					
c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)					
6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).					
7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))					
a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input type="checkbox"/> have been transmitted by the International Bureau.					
c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.					
d. <input checked="" type="checkbox"/> have not been made and will not be made.					
8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).					
9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).					
10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11. to 16. below concern other document(s) or information included:					
11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.					
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.					
13. <input type="checkbox"/> A FIRST preliminary amendment.					
<input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.					
14. <input type="checkbox"/> A substitute specification.					
15. <input type="checkbox"/> A change of power of attorney and/or address letter.					
16. <input type="checkbox"/> Other items or information:					

Express Mail No.:

EL179105382 US

U.S. APPLICATION NO. 09/500396 INTERNATIONAL APPLICATION NO. PCT/DE98/02692	ATTORNEY'S DOCKET NUMBER 67190/978621
--	--

17. ☒ The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):
 Search Report has been prepared by the EPO or JPO \$840.00
 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$670.00
 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but
 international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$760.00
 Neither international preliminary examination fee (37 CFR 1.482) nor international
 search fee (37 CFR 1.445(a)(2)) paid to USPTO \$970.00
 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all
 claims satisfied provisions of PCT Article 33(2)-(4) \$96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =	\$ 840	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$	

Claims	Number Filed	Number Extra	Rate	
Total Claims	7 - 20 =	0	X \$18.00	\$ 0
Independent Claims	2 - 3 =	0	X \$78.00	\$ 0
Multiple dependent claim(s) (if applicable)			+ \$260.00	\$
TOTAL OF ABOVE CALCULATIONS =				\$ 840

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must
also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

SUBTOTAL =	\$ 840	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).	\$	
TOTAL NATIONAL FEE =		\$ 840

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

TOTAL FEES ENCLOSED =	\$ 840	
------------------------------	--------	--

	Amount to be:	
	refunded	\$
	charged	\$

a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.


b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of **\$840.00** to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to
11-0600. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a)
Deposit Account No. or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Kenyon & Kenyon
 One Broadway
 New York, New York 10004


 SIGNATURE
 Richard L. Mayer, Reg. No. 22,490
 NAME
 10 MAR 20
 DATE

PTO/PCT Rec'd 25 JUL 2001

#4
69/508396

[67190/978621]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s) : Steffen KAISER et al.
Serial No. : 09/508,396
Filed : March 10, 2000
For : METHOD AND ARRANGEMENT FOR TESTING DIGITAL
PROTECTIVE CIRCUITS
Examiner : To Be Assigned
Art Unit : To Be Assigned

Assistant Commissioner
for Patents
Washington, D.C. 20231

**PRELIMINARY AMENDMENT AND
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend the above-identified application before examination, as set forth below.

IN THE SPECIFICATION AND ABSTRACT:

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification (including the Abstract, but without claims) accompanies this response. It is respectfully requested that the Substitute Specification (including Abstract) be entered to replace the Specification of record.

IN THE CLAIMS:

On the first page of the claims, first line, change "What is claimed is:" to: --What Is Claimed Is:--.

IN THE DRAWINGS:

Please amend the drawings as indicated on the attached red-marked sheet.

EL244506391US

IN THE CLAIMS:

Please cancel, without prejudice, claims 1-7 in the underlying PCT application.
Please also cancel, without prejudice, claims 1-7 in the annex to the International Preliminary Examination Report ("IPER").

Please add the following new claims:

8. (New) A method for testing a digital protective circuit, comprising:
- outputting digital current and voltage signals in cycles by a data processor to simulate a current and voltage response of a power supply network;
 - buffering consecutively the output digital current and voltage signals;
 - upon reaching a specific quantity of buffered digital current and voltage signals, outputting oldest ones of the buffered digital current and voltage signals in cycles;
 - rebuffering newer ones of the digital current and voltage signals;
 - generating corresponding currents and voltages from the output oldest ones of the digital current and voltage signals;
 - supplying the corresponding currents and voltages to the protective circuit;
 - detecting tripping signals from the protective circuit;
 - upon an occurrence of a tripping signal, outputting by the data processor network error-specific digital current and voltage signals while the oldest ones of the digital current and voltage signals continue to be output in cycles; and
 - buffering the output network error-specific digital current and voltage signals.
9. (New) The method according to claim 8, further comprising:
- determining the specific quantity of digital current and voltage signals buffered as a function of a response time of switches for which the protective circuit is used, taking a cycle time into account.

10. (New) The method according to claim 8, wherein the buffered digital current and voltage signals are output at an interval that corresponds to a duration of a tripping signal-free test period needed to output further buffered digital current and voltage signals.

11. (New) The method according to claim 8, wherein the buffered digital current and voltage signals are output at an interval that is greater than a duration of a tripping signal-free test period needed to output further buffered digital current and voltage signals.

12. (New) An arrangement for testing a digital protective circuit, comprising:

a data processing system to simulate a current and voltage response of a power network using a network model by outputting digital current and voltage signals in cycles;

a buffer assigned to the data processing system in which the output digital current and voltage signals are buffered consecutively, wherein, upon reaching a specific quantity of buffered digital current and voltage signals, oldest ones of the buffered digital current and voltage signals are output in cycles, newer ones of the buffered digital current and voltage signals being rebuffered;

a converter unit located downstream from the data processing system, the converter unit to generate corresponding currents and voltages from the output oldest ones of the digital current and voltage signals and to supply the corresponding currents and voltages to the protected circuit; and

a sensing arrangement assigned to the protective circuit, the sensing arrangement triggering the data processing arrangement to output network error-specific digital current and voltage signal from the protective circuit.

13. (New) The arrangement according to claim 11, wherein the buffer is sized to buffer all digital current and voltage signals output during a tripping signal-free test period corresponding to a response time of switches provided for interaction with the protective circuit.

14. (New) The arrangement according to claim 11, wherein the buffer is a ring buffer.

Remarks

The Preliminary Amendment cancels, without prejudice, claims 1-7 in the underlying PCT application. This Preliminary Amendment further cancels, without prejudice, claims 1-7 in the annex to the IPER, and adds new claims 8-14. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter.

The above amendments to the title, specification and abstract conform the title, specification and abstract to U.S. Patent and Trademark Office rules, and do not introduce new matter into the application.

The underlying PCT application No. PCT/DE98/02692 includes an International Search Report dated February 19, 1999. An English translation of the Search Report is included herewith.

The underlying PCT application also includes an IPER, dated December 7, 1999. An English translation of the IPER and the annex thereto is included herewith.

It is respectfully submitted that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully submitted,

By: 

Richard L. Mayer
Reg. No. 22,490

KENYON & KENYON
One Broadway
New York, NY 10004
(212) 425-7200

Dated: 25 July 2001

97 P 8 6 2 1

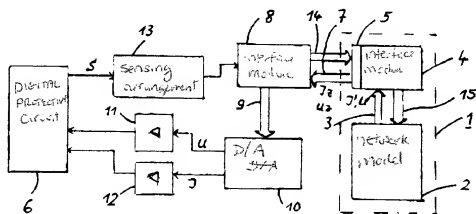


Fig 1

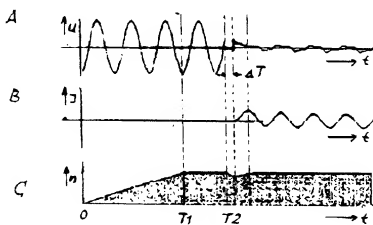


Fig 2

[67190/978621]

METHOD AND ARRANGEMENT FOR TESTING DIGITAL PROTECTIVE CIRCUITS

FIELD OF THE INVENTION

The present invention relates to a method for testing digital protective circuits in which data processing means are used to simulate the current and voltage response of a power supply network by outputting digital current and voltage signals in cycles; corresponding currents and voltages are generated from the digital current and voltage signals and supplied to a protective circuit to be tested; and tripping signals from the respective protective circuit are detected.

BACKGROUND INFORMATION

A method of this type is described in "Elektrizitätswirtschaft", Vol. 78 (1979), No. 1, pages 18 to 23. In this method, a data processing system emits digital current and voltage signals in cycles on the basis of the current and voltage ratios present in a power supply network; the data processing system thus forms a network model. Corresponding currents and voltages can be generated from the digital current and voltage signals and supplied to a protective circuit to be tested. When currents and voltages corresponding to an error in the simulated power supply network are applied to the protective circuit to be tested, the latter generates a tripping signal. The occurrence of the tripping signal can be assigned to the respective currents and voltages to draw conclusions about the tripping performance of the respective protective circuit to be tested.

To test the digital protective circuits under conditions that are as close to reality as possible, it is useful to control the data processing system simulating the power supply network and representing a network model when detecting a tripping signal so that the data processing system also outputs network error-specific digital current and voltage signals. Because this requires longer computing times than are needed for

digital current and voltage signals that indicate a normal, continuous variation of currents and voltages, it is possible to use a very high-speed data processing system and to have the latter output network error-specific digital current and voltage signals when a tripping signal is emitted by the respective protective circuit to be tested. However, a data processing system of this type is highly complex and therefore very expensive to produce or purchase.

SUMMARY

An object of the present invention is to provide a method for testing digital protective circuits in which a conventional data processing system, such as a personal computer, can be used to test digital protective circuits under close-to-real conditions even using network error-specific digital current and voltage signals from a data processing system of this type.

This object is achieved with a method according to the present invention in that when the test of a protective circuit begins, the output digital current and voltage signals are first buffered consecutively, and, upon reaching a specific quantity of buffered digital current and voltage signals, the oldest buffered digital current and voltage signals in each case are output in cycles and supplied to the respective protective circuit to be tested, and more recent output digital current and voltage signals are rebuffered; upon the occurrence of a tripping signal, a data processing arrangement outputs network error-specific digital current and voltage signals, while the oldest buffered digital current and voltage signals in each case continue to be output in cycles, and the network error-specific digital current and voltage signals are each rebuffered after being output.

German Patent No. 150 947 describes computer-supported testing of protective circuits in which non-stationary processes that are simulated with digital models, for example, are stored and

the stored data is provided to the test object in a specific order. All of the data is accepted before sensing the protective circuit. To test a test object, the data is sent to the test object in a specific order and the signal response of the test object is detected.

One advantage of the method according to the present invention is that it can be carried out with a comparatively simple data processing system design in the form of a conventional personal computer. This is due to the fact that, in the method according to the present application, the digital current and voltage signals output by the data processing system are first buffered consecutively until a specific quantity of buffered digital current and voltage signals is reached. The buffered signals are output in cycles during the test procedure. This applies even if a tripping signal is generated. Nevertheless, the occurrence of the tripping signal causes the data processing system to output network error-specific digital current and voltage signals, which results in a longer computing time than would be needed with an undisturbed, simulated network state, due to the complicated arithmetic operations required. The network error-specific digital current and voltage signals are also buffered. The quantity of digital current and voltage signals is thus replenished. The problem of insufficient computing speed of the relatively simple data processing system used is thus overcome to a certain extent by buffering the signals.

The present invention takes advantage of the fact that, in situations where a protective circuit is used, the tripping signal generated by the circuit when an error occurs in the network to be monitored is immediately applied to a switch, usually a circuit-breaker; however, the circuit-breaker to which this signal is applied does not immediately open its contacts, but instead requires a certain switch response time for this purpose, which ranges between approximately 20 and 100 ms—and is frequently around 60 ms. Only at the end of the

switch response time do new current and voltage ratios actually occur in the network, a fact that must also be taken into account when testing a digital protective circuit with the method according to the present invention.

In light of this fact, it is deemed advantageous in the method according to the present invention to determine the specific quantity of digital current and voltage signals buffered in cycles on the basis of the response time of switches for which the protective circuits to be tested are to be used, taking the cycle time into account. With the method according to the present invention, this ensures that the network error-specific digital current and voltage signals that correspond to the changed network conditions are output at the end of the switch response time, just like in a real situation.

In the method according to the present invention, the buffered digital current and voltage signals can be output at an interval that corresponds to the duration of a tripping signal-free test period needed to output further digital current and voltage signals in each case.

In another embodiment of the method according to the present invention, the buffered digital current and voltage signals are output at an output rate that is greater than the duration of a tripping signal-free test period needed to output digital current and voltage signals in each case.

An arrangement of this type is also described in the publication cited above. To further develop an arrangement of this type so that it can also take into account network error-specific digital current and voltage signals following the generation of a tripping signal, without requiring a great deal of computing power, the data processing system is assigned, according to the present invention, a buffer in which the output digital current and voltage signals are first buffered consecutively; a sensing arrangement that detects

tripping signals from the respective protective circuit is connected on the output side to the data processing system.

The arrangement according to the present invention differs from the arrangement described in German Patent No. 150 947 in that it has a storage device in the form of a buffer in which data is entered during the test and from which data is output during the test. A further difference lies in the provision of a sensing arrangement that controls the data processing system upon the occurrence of a tripping signal from the respective protective circuit to be tested so that the data processing system sends network error-specific data to the buffer.

One significant advantage of the arrangement according to the present invention is that it can make do with a data processing system in the form of a conventional personal computer and can therefore be produced at comparatively little cost; the additional cost of the buffer is comparatively low. A further advantage is that the test can also be carried out with network error-specific current and voltage signals after a tripping signal occurs, using a simple circuitry design.

In the arrangement according to the present invention, the buffer advantageously has a sufficiently large storage capacity to buffer all current and voltage signals output during a tripping signal-free test period corresponding to the response time of switches provided for interaction with the protective circuits to be tested.

The buffer is advantageously a ring buffer, i.e. a buffer in which new data is stored for current and voltage signals previously output by the data processing system.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a block diagram of one example embodiment of the method according to the present invention.

Fig. 2 shows three diagrams illustrating the operation of the buffer shown in the block diagram.

DETAILED DESCRIPTION

Figure 1 shows a block representing a data processing system 1, which is formed by a conventional personal computer. Data processing system 1 includes a network model 2 that can be provided by a NETOMAC simulation program, which is described in detail in the publication mentioned above. Network model 2 outputs digital current and voltage signals J' and U' , respectively, via a bus 3, based on the performance of a power supply network to be simulated. These digital current and voltage values J' and U' , respectively, are further processed in an interface module 4, which is also used for internal system communication. Interface module 4 is provided with a buffer in the form of a ring buffer 5 in which a specific number of output digital current and voltage signals J' and U' , respectively, are buffered. When the test of a digital protective circuit 6 begins, digital current and voltage signals J' and U' , respectively, emitted by network model 2 are first buffered in ring buffer 5 in cycles, i.e. based on the system clock. The storage capacity of this ring buffer 5 is selected in view of the system clock cycle so that the buffer becomes full at the end of a period that corresponds to response time T_{ls} of switches (not illustrated) for which protective circuit 6 to be tested is to be used.

When a time T_{ls} of this type elapses after the beginning of the test, a buffered value of current and voltage signal J_z and U_z , respectively, is output from ring buffer 5 with the next system clock cycle and transmitted via a bus 7 to a further interface module 8, which applies a load to a digital-analog converter 10 via an additional bus 9. In this digital-analog converter 10, currents J and voltages U , respectively, corresponding to the respectively transmitted digital current and voltage values are generated and supplied to protective circuit 6 to be tested via amplifiers 11 and 12. Diagram A of

Figure 2 shows the variation over time t of voltage U generated in this manner. Likewise, Diagram B shows generated current J over time, which initially appears to have a value of zero only due to the scale selected. Diagram C of Figure 2 shows number n of the digital current and voltage values stored in ring buffer 5 over time t . Prior to a time T_1 after the beginning of the test, only ring buffer 5 is first filled with digital current and voltage values at time zero. After time T_1 is reached, the amount of data entered into the ring buffer cyclically equals the amount of data output. This means that number n of stored data remains the same after time T_1 .

In the illustrated example, it is assumed that protective circuit 6 to be tested emits a tripping signal S at time T_2 as a result of current and voltage values J and U that it receives. This tripping signal S is detected by a sensing arrangement 13 and passed on to the one interface module 4 via a further interface module 8 over a bus 14. The one interface module 4 subsequently causes network model 2 to output, via a bus 15, digital current and voltage signals that are network error-specific, i.e. would occur in the event of a short-circuit in the simulated network. As shown in Diagrams A and B of Figure 2, fluctuations occur over a period ΔT , the calculation of which in network model 2 requires a relatively large amount of computing power and thus takes a relatively long time so that these network error-specific digital current and voltage signals are output at a relatively slow rate. Because the buffered digital current and voltage values continue to be output from ring buffer 5 in cycles, although not at the same rate at which network error-specific digital current and voltage values are generated by network model 2, the quantity of buffered data in ring buffer 5 starts to decrease from time T_2 onward, as clearly illustrated by Diagram C of Figure 2.

If it is assumed that digital current and voltage signals J' and U' in the network model are output at an interval Δt that

is equal to required computing time t_{min} when a tripping signal S is not present and a fluctuation does not occur, ring buffer 5 cannot be completely refilled. However, if it is assumed that the computing time of network model 2 is t_{max} after a tripping signal occurs, fluctuations can occur in response time Tls of the switches during a simulation $Tls/(t_{max}-t_{min})$ until the buffer is empty. Assuming typical values for $t_{max}=1$ ms, $t_{min}=0.5$ ms, and $Tls=60$ ms, 120 fluctuations can occur during the simulation until ring buffer 5 can no longer provide any more output data. In practice, this is entirely sufficient.

In the illustrated example, it is assumed that interval Δt is greater than required computing time t_{min} of network model 2 before a tripping signal S occurs, and that $\Delta t > t_{min}$. Filling time t_f of ring buffer 5 can then be determined with the following equation:

$$t_f = \left(\frac{t_{max} - F \cdot t_{min}}{F - 1} \right) \cdot F$$

where $F = \Delta t / t_{min}$. The assumptions described above by way of an example then yield a filling time t_f of roughly 5 ms. This means that simulations lasting 5 ms without any fluctuations are sufficient to compensate for the time lost by the fluctuation calculation and to completely refill ring buffer 5. This gives the system a 90% increase in performance in this case. As clearly shown by Figure C, simulations of practically unlimited length can be carried out in this case because the switch never carries out a sufficiently large number of switching operations in a short period of time to allow buffer 5 to be emptied.

Abstract

A method and an arrangement for testing digital protective circuits in which data processing means are used to simulate a power supply network by outputting digital current and voltage signals in cycles. Corresponding current and voltages are generated from these signals and supplied to a protective circuit to be tested. To test protective circuits under conditions that are as close to reality as possible with a method of this type, using a comparatively simple data processing system design, the output digital current and voltage signals are first buffered consecutively when the test of a protective circuit begins. Upon reaching a specific quantity of buffered signals, the oldest buffered signals in each case are output in cycles, and more recent output signals are buffered. Upon the occurrence of a tripping signal, output continues in cycles, and data processing means output and buffer network-specific digital current and voltage signals.

METHOD AND ARRANGEMENT FOR TESTING DIGITAL PROTECTIVE CIRCUITS

[Description] FIELD OF THE INVENTION

The present invention relates to a method for testing digital protective circuits in which data processing means are used to simulate the current and voltage response of a power supply network by outputting digital current and voltage signals in cycles; corresponding currents and voltages are generated from the digital current and voltage signals and supplied to a protective circuit to be tested; and tripping signals from the respective protective circuit are detected.

BACKGROUND INFORMATION

A method of this type is [generally known from] described in "Elektrizitätswirtschaft", Vol. 78 (1979), No. 1, pages 18 to 23. [According to a] In this method [of this type], a data processing system emits digital current and voltage signals in cycles on the basis of the current and voltage ratios present in a power supply network; the data processing system thus forms a network model. Corresponding currents and voltages can be generated from the digital current and voltage signals and supplied to a protective circuit to be tested. When currents and voltages corresponding to an error in the simulated power supply network are applied to the protective circuit to be tested, the latter generates a tripping signal. The occurrence of the tripping signal can be assigned to the respective currents and voltages to draw conclusions about the tripping performance of the respective protective circuit to be tested.

To test the digital protective circuits under conditions that are as close to reality as possible, it is useful to control the data processing system simulating the power supply network and representing a network model when detecting a tripping signal so that the data processing system also outputs network error-specific digital current and voltage signals. Because

1 this requires longer computing times than are needed for
2 digital current and voltage signals that indicate a normal,
3 continuous variation of currents and voltages, it is
4 [conceivable] possible to use a very high-speed data
5 processing system and to have the latter output network
6 error-specific digital current and voltage signals when a
7 tripping signal is emitted by the respective protective
8 circuit to be tested. However, a data processing system of
9 this type is highly complex and therefore very expensive to
10 produce or purchase.

SUMMARY

11 An [The] object of the present invention is to provide a
12 method for testing digital protective circuits in which a
13 conventional data processing system, such as a personal
14 computer, can be used to test digital protective circuits
15 under close-to-real conditions even using network
16 error-specific digital current and voltage signals from a data
17 processing system of this type.

18 This object is achieved with a method according to the present
19 invention [of the type mentioned in the preamble] in that when
20 the test of a protective circuit begins, the output digital
21 current and voltage signals are first buffered consecutively,
22 and, upon reaching a specific quantity of buffered digital
23 current and voltage signals, the oldest buffered digital
24 current and voltage signals in each case are output in cycles
25 and supplied to the respective protective circuit to be
26 tested, and more recent output digital current and voltage
27 signals are rebuffered; upon the occurrence of a tripping
28 signal, a data processing [means output] arrangement outputs
29 network error-specific digital current and voltage signals,
30 while the oldest buffered digital current and voltage signals
31 in each case continue to be output in cycles, and the network
32 error-specific digital current and voltage signals are each
33 rebuffered after being output.

German Patent No. 150 947 describes computer-supported testing of protective circuits in which non-stationary processes that are simulated with digital models, for example, are stored and the stored data is provided to the test object in a specific order. All of the data is accepted before sensing the protective circuit. To test a test object, the data is sent to the test object in a specific order and the signal response of the test object is detected.

One [A significant] advantage of the method according to the present invention is that it can be carried out with a comparatively simple data processing system design in the form of a conventional personal computer. This is due to the fact that, in the method according to the present application, the digital current and voltage signals output by the data processing system are first buffered consecutively until a specific quantity of buffered digital current and voltage signals is reached. The buffered signals are output in cycles during the test procedure. This applies even if a tripping signal is generated. Nevertheless, the occurrence of the tripping signal causes the data processing system to output network error-specific digital current and voltage signals, which results in a longer computing time than would be needed with an undisturbed, simulated network state, due to the complicated arithmetic operations required. The network error-specific digital current and voltage signals are also buffered. The quantity of digital current and voltage signals is thus replenished. The problem of [essentially] insufficient computing speed of the relatively simple data processing system used is thus overcome to a certain extent by buffering the signals.

The present invention takes advantage of the fact that, in situations where a protective circuit is used, the tripping signal generated by the circuit when an error occurs in the network to be monitored is immediately applied to a switch,

usually a circuit-breaker; however, the circuit-breaker to which this signal is applied does not immediately open its contacts, but instead requires a certain switch response time for this purpose, which ranges between approximately 20 and 100 ms-and is frequently around 60 ms. Only at the end of the switch response time do new current and voltage ratios actually occur in the network, a fact that must also be taken into account when testing a digital protective circuit with the method according to the present invention.

In light of this fact, it is deemed advantageous in the method according to the present invention to determine the specific quantity of digital current and voltage signals buffered in cycles on the basis of the response time of switches for which the protective circuits to be tested are to be used, taking the cycle time into account. With the method according to the present invention, this ensures that the network error-specific digital current and voltage signals that correspond to the changed network conditions are output at the end of the switch response time, just like in a real situation.

In the method according to the present invention, the buffered digital current and voltage signals can be output at [a variable output rate. It is viewed as advantageous to output the buffered] an interval that corresponds to the duration of a tripping signal-free test period needed to output further digital current and voltage signals [at an output rate that corresponds to the duration of a tripping signal-free test period needed to output further digital current and voltage signals] in each case[, thus achieving cyclical output. While the quantity of buffered current and voltage signals in a method of this type is used up after a certain amount of time following a simulated network error, it frequently is fully sufficient for a practical simulation. The special advantage is that, in this embodiment of the method according to the

present invention, the output frequency of the digital current and voltage signals can be more or less doubled compared to the method described in the preamble].

5 In another embodiment of the method according to the present invention, the buffered digital current and voltage signals are output at an output rate that is greater than the duration of a tripping signal-free test period needed to output digital current and voltage signals[. In this embodiment of the method
10 according to the present invention, the quantity of buffered digital current and voltage signals is replenished after a tripping signal occurs so that, according to this method embodiment, simulations of practically any duration can be carried out.

15 The present invention also concerns a test arrangement including a data processing system that simulates the current and voltage response of a power supply network in the form of a network model by outputting digital current and voltage
20 signals in cycles, and including a converter unit, located downstream from the data processing system, which generates corresponding currents and voltages from the digital current and voltage signals and supplies them to a protective circuit to be tested.] in each case.

25 An arrangement of this type is also [generally known from described in the publication cited above. To further develop an arrangement of this type so that it can also take into account network error-specific digital current and voltage
30 signals following the generation of a tripping signal, without requiring a great deal of computing power, the data processing system is assigned, according to the present invention, a buffer in which the output digital current and voltage signals are first buffered consecutively; a sensing arrangement that
35 detects tripping signals from the respective protective

circuit is connected on the output side to the data processing system.

The arrangement according to the present invention differs from the arrangement described in German Patent No. 150 947 in that it has a storage device in the form of a buffer in which data is entered during the test and from which data is output during the test. A further difference lies in the provision of a sensing arrangement that controls the data processing system upon the occurrence of a tripping signal from the respective protective circuit to be tested so that the data processing system sends network error-specific data to the buffer.

One significant advantage of the arrangement according to the present invention is that it can make do with a data processing system in the form of a conventional personal computer and can therefore be produced at comparatively little cost; the additional cost of the buffer is comparatively low. A further advantage is that the test can also be carried out with network error-specific current and voltage signals after a tripping signal occurs, using a simple circuitry design.

In the arrangement according to the present invention, the buffer advantageously has a sufficiently large storage capacity to buffer all current and voltage signals output during a tripping signal-free test period corresponding to the response time of switches provided for interaction with the protective circuits to be tested.

The buffer is advantageously a ring buffer, i.e. a buffer in which new data is stored for current and voltage signals previously output by the data processing system.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. [To further explain the present invention, Figure] 1 shows a block diagram [illustrating] of one example embodiment of the method according to the present invention[, while Figure].

Fig. 2 shows three diagrams illustrating the operation of the buffer shown in the block diagram.

DETAILED DESCRIPTION

Figure 1 shows a block representing a data processing system 1, which is formed by a conventional personal computer. Data processing system 1 includes a network model 2 that can be provided by a NETOMAC simulation program, which is described in detail in the publication mentioned [in the preamble] above. Network model 2 outputs digital current and voltage signals J' and U', respectively, via a bus 3, based on the performance of a power supply network to be simulated. These digital current and voltage values [I'] J' and U', respectively, are further processed in an interface module 4, which is also used for internal system communication. Interface module 4 is provided with a buffer in the form of a ring buffer 5 in which a specific number of output digital current and voltage signals J' and U', respectively, are buffered. When the test of a digital protective circuit 6 begins, digital current and voltage signals J' and U', respectively, emitted by network model 2 are first buffered in ring buffer 5 in cycles, i.e. based on the system clock. The storage capacity of this ring buffer 5 is selected in view of the system clock cycle so that the buffer becomes full at the end of a period that corresponds to response time T_{ls} of switches (not illustrated) for which protective circuit 6 to be tested is to be used.

When a time T_{ls} of this type elapses after the beginning of the test, a buffered value of current and voltage signal J_z and U_z, respectively, is output from ring buffer 5 with the next system clock cycle and transmitted via a bus 7 to a

further interface module 8, which applies a load to a digital-analog converter 10 via an additional bus 9. In this digital-analog converter 10, currents J and voltages U, respectively, corresponding to the respectively transmitted digital current and voltage values are generated and supplied to protective circuit 6 to be tested via amplifiers 11 and 12. Diagram A of Figure 2 shows the variation over time t of voltage U generated in this manner. Likewise, Diagram B shows generated current J over time, which initially appears to have a value of zero only due to the scale selected. Diagram C of Figure 2 shows number n of the digital current and voltage values stored in ring buffer 5 over time t. [We can see that, prior] Prior to a time T1 after the beginning of the test, only ring buffer 5 is first filled with digital current and voltage values at time zero. After time T1 is reached, the amount of data entered into the ring buffer cyclically equals the amount of data output. This means that number n of stored data remains the same after time T1.

In the illustrated example, it is assumed that protective circuit 6 to be tested emits a tripping signal S at time T2 as a result of current and voltage values J and U that it receives. This tripping signal S is detected by a sensing arrangement 13 and passed on to the one interface module 4 via a further interface module 8 over a bus 14. The one interface module 4 subsequently causes network model 2 to output, via a bus 15, digital current and voltage signals that are network error-specific, i.e. would occur in the event of a short-circuit in the simulated network. As shown in Diagrams A and B of Figure 2, fluctuations occur over a period Δt , the calculation of which in network model 2 requires a relatively large amount of computing power and thus takes a relatively long time so that these network error-specific digital current and voltage signals are output at a relatively slow rate. Because the buffered digital current and voltage values continue to be output from ring buffer 5 in cycles, although

not at the same rate at which network error-specific digital current and voltage values are generated by network model 2, the quantity of buffered data in ring buffer 5 starts to decrease from time T2 onward, as clearly illustrated by Diagram C of Figure 2.

If [we assume] it is assumed that [output rate Δt of] digital current and voltage signals J' and U' in the network model are output at an interval Δt that is equal to required computing time t_{min} when a tripping signal S is not present and a fluctuation does not occur, ring buffer 5 cannot be completely refilled. However, if [we assume] it is assumed that the computing time of network model 2 is t_{max} after a tripping signal occurs, fluctuations can occur in response time T_{ls} of the switches during a simulation $T_{ls}/(t_{max}-t_{min})$ until the buffer is empty. Assuming typical values for $t_{max}=1$ ms, $t_{min}=0.5$ ms, and $T_{ls}=60$ ms, 120 fluctuations can occur during the simulation until ring buffer 5 can no longer provide any more output data. In practice, this is entirely sufficient.

In the illustrated example, it is assumed that [output rate] interval Δt is greater than required computing time t_{min} of network model 2 before a tripping signal S occurs, and that $\Delta t > t_{min}$. Filling time t_f of ring buffer 5 can then be determined with the following equation:

$$t_f = \left(\frac{t_{max} - F \cdot t_{min}}{F - 1} \right) \cdot F$$

where $F = \Delta t / t_{min}$. The assumptions described above by way of an example then yield a filling time t_f of roughly 5 ms. This means that simulations lasting 5 ms without any fluctuations are sufficient to compensate for the time lost by the fluctuation calculation and to completely refill ring buffer

5. This gives the system a 90% increase in performance in this case. As clearly shown by Figure C, simulations of practically unlimited length can be carried out in this case because the switch never carries out a sufficiently large number of switching operations in a short period of time to allow buffer 5 to be emptied.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233

Abstract

A method and an arrangement for testing digital protective circuits in which data processing means are used to simulate a power supply network by outputting digital current and voltage signals in cycles. Corresponding current and voltages are generated from these signals and supplied to a protective circuit to be tested. [

]To test protective circuits under conditions that are as close to reality as possible with a method of this type, using a comparatively simple data processing system design, the output digital current and voltage signals [(J', U')] are first buffered consecutively when the test of a protective circuit [(6)] begins. Upon reaching a specific quantity of buffered signals[(Iz, Uz)], the oldest buffered signals [(Iz, Uz)] in each case are output in cycles, and more recent output signals [(J', U')] are buffered. Upon the occurrence of a tripping signal, output continues in cycles, and data processing means output and buffer network-specific digital current and voltage signals.

[
FIG 1]

[67190/978621]

METHOD AND ARRANGEMENT FOR TESTING DIGITAL PROTECTIVE CIRCUITS

Description

5 The present invention relates to a method for testing digital protective circuits in which data processing means are used to simulate the current and voltage response of a power supply network by outputting digital current and voltage signals in cycles; corresponding currents and voltages are generated from the digital current and voltage signals and supplied to a protective circuit to be tested; and tripping signals from the respective protective circuit are detected.

10 A method of this type is generally known from "Elektrizitätswirtschaft", Vol. 78 (1979), No. 1, pages 18 to 23. According to a method of this type, a data processing system emits digital current and voltage signals in cycles on the basis of the current and voltage ratios present in a power supply network; the data processing system thus forms a network model. Corresponding currents and voltages can be generated from the digital current and voltage signals and supplied to a protective circuit to be tested. When currents and voltages corresponding to an error in the simulated power supply network are applied to the protective circuit to be tested, the latter generates a tripping signal. The occurrence of the tripping signal can be assigned to the respective currents and voltages to draw conclusions about the tripping performance of the respective protective circuit to be tested.

20 To test the digital protective circuits under conditions that are as close to reality as possible, it is useful to control the data processing system simulating the power supply network and representing a network model when detecting a tripping signal so that the data processing system also outputs network error-specific digital current and voltage signals. Because this requires longer computing times than are needed for digital current and voltage signals that indicate a normal,

continuous variation of currents and voltages, it is conceivable to use a very high-speed data processing system and to have the latter output network error-specific digital current and voltage signals when a tripping signal is emitted by the respective protective circuit to be tested. However, a data processing system of this type is highly complex and therefore very expensive to produce or purchase.

The object of the present invention is to provide a method for testing digital protective circuits in which a conventional data processing system, such as a personal computer, can be used to test digital protective circuits under close-to-real conditions even using network error-specific digital current and voltage signals from a data processing system of this type.

This object is achieved with a method according to the present invention of the type mentioned in the preamble in that when the test of a protective circuit begins, the output digital current and voltage signals are first buffered consecutively, and, upon reaching a specific quantity of buffered digital current and voltage signals, the oldest buffered digital current and voltage signals in each case are output in cycles and supplied to the respective protective circuit to be tested, and more recent output digital current and voltage signals are rebuffered; upon the occurrence of a tripping signal, data processing means output network error-specific digital current and voltage signals, while the oldest buffered digital current and voltage signals in each case continue to be output in cycles, and the network error-specific digital current and voltage signals are each rebuffered after being output.

A significant advantage of the method according to the present invention is that it can be carried out with a comparatively simple data processing system design in the form of a conventional personal computer. This is due to the fact that,

in the method according to the present application, the digital current and voltage signals output by the data processing system are first buffered consecutively until a specific quantity of buffered digital current and voltage signals is reached. The buffered signals are output in cycles during the test procedure. This applies even if a tripping signal is generated. Nevertheless, the occurrence of the tripping signal causes the data processing system to output network error-specific digital current and voltage signals, which results in a longer computing time than would be needed with an undisturbed, simulated network state, due to the complicated arithmetic operations required. The network error-specific digital current and voltage signals are also buffered. The quantity of digital current and voltage signals is thus replenished. The problem of essentially insufficient computing speed of the relatively simple data processing system used is thus overcome to a certain extent by buffering the signals.

The present invention takes advantage of the fact that, in situations where a protective circuit is used, the tripping signal generated by the circuit when an error occurs in the network to be monitored is immediately applied to a switch, usually a circuit-breaker; however, the circuit-breaker to which this signal is applied does not immediately open its contacts, but instead requires a certain switch response time for this purpose, which ranges between approximately 20 and 100 ms--and is frequently around 60 ms. Only at the end of the switch response time do new current and voltage ratios actually occur in the network, a fact that must also be taken into account when testing a digital protective circuit with the method according to the present invention.

In light of this fact, it is deemed advantageous in the method according to the present invention to determine the specific quantity of digital current and voltage signals buffered in cycles on the basis of the response time of switches for which

the protective circuits to be tested are to be used, taking the cycle time into account. With the method according to the present invention, this ensures that the network error-specific digital current and voltage signals that correspond to the changed network conditions are output at the end of the switch response time, just like in a real situation.

In the method according to the present invention, the buffered digital current and voltage signals can be output at a variable output rate. It is viewed as advantageous to output the buffered digital current and voltage signals at an output rate that corresponds to the duration of a tripping signal-free test period needed to output further digital current and voltage signals in each case, thus achieving cyclical output. While the quantity of buffered current and voltage signals in a method of this type is used up after a certain amount of time following a simulated network error, it frequently is fully sufficient for a practical simulation. The special advantage is that, in this embodiment of the method according to the present invention, the output frequency of the digital current and voltage signals can be more or less doubled compared to the method described in the preamble.

In another embodiment of the method according to the present invention, the buffered digital current and voltage signals are output at an output rate that is greater than the duration of a tripping signal-free test period needed to output digital current and voltage signals. In this embodiment of the method according to the present invention, the quantity of buffered digital current and voltage signals is replenished after a tripping signal occurs so that, according to this method embodiment, simulations of practically any duration can be carried out.

The present invention also concerns a test arrangement including a data processing system that simulates the current and voltage response of a power supply network in the form of

a network model by outputting digital current and voltage signals in cycles, and including a converter unit, located downstream from the data processing system, which generates corresponding currents and voltages from the digital current and voltage signals and supplies them to a protective circuit to be tested.

An arrangement of this type is also generally known from the publication cited above. To further develop an arrangement of this type so that it can also take into account network error-specific digital current and voltage signals following the generation of a tripping signal, without requiring a great deal of computing power, the data processing system is assigned, according to the present invention, a buffer in which the output digital current and voltage signals are first buffered consecutively; a sensing arrangement that detects tripping signals from the respective protective circuit is connected on the output side to the data processing system.

One significant advantage of the arrangement according to the present invention is that it can make do with a data processing system in the form of a conventional personal computer and can therefore be produced at comparatively little cost; the additional cost of the buffer is comparatively low. A further advantage is that the test can also be carried out with network error-specific current and voltage signals after a tripping signal occurs, using a simple circuitry design.

In the arrangement according to the present invention, the buffer advantageously has a sufficiently large storage capacity to buffer all current and voltage signals output during a tripping signal-free test period corresponding to the response time of switches provided for interaction with the protective circuits to be tested.

The buffer is advantageously a ring buffer, i.e. a buffer in which new data is stored for current and voltage signals previously output by the data processing system.

To further explain the present invention, Figure 1 shows a block diagram illustrating one embodiment of the method according to the present invention, while Figure 2 shows three diagrams illustrating the operation of the buffer shown in the block diagram.

Figure 1 shows a block representing a data processing system 1, which is formed by a conventional personal computer. Data processing system 1 includes a network model 2 that can be provided by a NETOMAC simulation program, which is described in detail in the publication mentioned in the preamble. Network model 2 outputs digital current and voltage signals J' and U' , respectively, via a bus 3, based on the performance of a power supply network to be simulated. These digital current and voltage values I' and U' , respectively, are further processed in an interface module 4, which is also used for internal system communication. Interface module 4 is provided with a buffer in the form of a ring buffer 5 in which a specific number of output digital current and voltage signals J' and U' , respectively, are buffered. When the test of a digital protective circuit 6 begins, digital current and voltage signals J' and U' , respectively, emitted by network model 2 are first buffered in ring buffer 5 in cycles, i.e. based on the system clock. The storage capacity of this ring buffer 5 is selected in view of the system clock cycle so that the buffer becomes full at the end of a period that corresponds to response time T_{ls} of switches (not illustrated) for which protective circuit 6 to be tested is to be used.

When a time T_{ls} of this type elapses after the beginning of the test, a buffered value of current and voltage signal J_z and U_z , respectively, is output from ring buffer 5 with the next system clock cycle and transmitted via a bus 7 to a

further interface module 8, which applies a load to a digital-analog converter 10 via an additional bus 9. In this digital-analog converter 10, currents J and voltages U, respectively, corresponding to the respectively transmitted digital current and voltage values are generated and supplied to protective circuit 6 to be tested via amplifiers 11 and 12. Diagram A of Figure 2 shows the variation over time t of voltage U generated in this manner. Likewise, Diagram B shows generated current J over time, which initially appears to have a value of zero only due to the scale selected. Diagram C of Figure 2 shows number n of the digital current and voltage values stored in ring buffer 5 over time t. We can see that, prior to a time T1 after the beginning of the test, only ring buffer 5 is first filled with digital current and voltage values at time zero. After time T1 is reached, the amount of data entered into the ring buffer cyclically equals the amount of data output. This means that number n of stored data remains the same after time T1.

In the illustrated example, it is assumed that protective circuit 6 to be tested emits a tripping signal S at time T2 as a result of current and voltage values J and U that it receives. This tripping signal S is detected by a sensing arrangement 13 and passed on to the one interface module 4 via a further interface module 8 over a bus 14. The one interface module 4 subsequently causes network model 2 to output, via a bus 15, digital current and voltage signals that are network error-specific, i.e. would occur in the event of a short-circuit in the simulated network. As shown in Diagrams A and B of Figure 2, fluctuations occur over a period ΔT , the calculation of which in network model 2 requires a relatively large amount of computing power and thus takes a relatively long time so that these network error-specific digital current and voltage signals are output at a relatively slow rate. Because the buffered digital current and voltage values continue to be output from ring buffer 5 in cycles, although

not at the same rate at which network error-specific digital current and voltage values are generated by network model 2, the quantity of buffered data in ring buffer 5 starts to decrease from time T2 onward, as clearly illustrated by Diagram C of Figure 2.

If we assume that output rate Δt of digital current and voltage signals J' and U' in the network model is equal to required computing time t_{min} when a tripping signal S is not present and a fluctuation does not occur, ring buffer 5 cannot be completely refilled. However, if we assume that the computing time of network model 2 is t_{max} after a tripping signal occurs, fluctuations can occur in response time T_{ls} of the switches during a simulation $T_{ls}/(t_{max}-t_{min})$ until the buffer is empty. Assuming typical values for $t_{max}=1$ ms, $t_{min}=0.5$ ms, and $T_{ls}=60$ ms, 120 fluctuations can occur during the simulation until ring buffer 5 can no longer provide any more output data. In practice, this is entirely sufficient.

In the illustrated example, it is assumed that output rate Δt is greater than required computing time t_{min} of network model 2 before a tripping signal S occurs, and that $\Delta t > t_{min}$. Filling time t_f of ring buffer 5 can then be determined with the following equation:

$$t_f = \left(\frac{t_{max} - F \cdot t_{min}}{F - 1} \right) \cdot F$$

where $F = \Delta t / t_{min}$. The assumptions described above by way of an example then yield a filling time t_f of roughly 5 ms. This means that simulations lasting 5 ms without any fluctuations are sufficient to compensate for the time lost by the fluctuation calculation and to completely refill ring buffer 5. This gives the system a 90% increase in performance in this case. As clearly shown by Figure C, simulations of practically

unlimited length can be carried out in this case because the switch never carries out a sufficiently large number of switching operations in a short period of time to allow buffer 5 to be emptied.

5

Patent Claims

1. A method for testing digital protective circuits in which
 - data processing means are used to simulate the current and voltage response of a power supply network by outputting digital current and voltage signals (J' , U') in cycles;
 - corresponding currents (J) and voltages (U) are generated from the digital current and voltage signals (J' , U') and supplied to a protective circuit (6) to be tested; and
 - tripping signals (S) from the respective protective circuit (6) are detected,

characterized in that

- when the test of a protective circuit (6) begins, the output digital current and voltage signals (J' , U') are first buffered consecutively;
- upon reaching a specific quantity of buffered digital current and voltage signals (J_z , U_z), the oldest buffered digital current and voltage signals (J_z , U_z) in each case are output in cycles and supplied to the respective protective circuit (6) to be tested, and more recent output digital current and voltage signals (J' , U') are rebuffered; and
- upon the occurrence of a tripping signal (S), data processing means output network error-specific digital current and voltage signals (J' , U'), while the oldest buffered digital current and voltage signals (J_z , U_z) in each case continue to be output in cycles, and the network error-specific digital current and voltage signals (J' , U') are each buffered after being output.

2. The method according to Claim 1,

characterized in that

- the specific quantity of digital current and voltage signals (J_z , U_z) buffered in cycles is determined on the basis of the response time (T_{ls}) of switches for which the protective circuits (6) to be tested are to be used, taking the cycle time into account.

3. The method according to Claim 1 or 2, characterized in that

- the buffered digital current and voltage signals (I_z , U_z) are output at an output rate (Δt) that corresponds to the duration of a tripping signal-free test period needed to output further digital current and voltage signals (J' , U') in each case.

4. The method according to Claim 1 or 2, characterized in that

- the buffered digital current and voltage signals (J_z , U_z) are output at an output rate (Δt) that is greater than the duration of a tripping signal-free test period needed to output further digital current and voltage signals (J' , U') in each case.

5. An arrangement for testing digital protective circuits, having

- a data processing system (1) that simulates the current and voltage response of a power supply network in the form of a network model by outputting digital current and voltage signals (J' , U') in cycles; and
- a converter unit (10), located downstream from the data processing system (1), which generates corresponding currents and voltages (J , U) from the digital current and voltage signals (J' , U') and supplies them to a protective circuit (6) to be tested,

characterized in that

- the data processing system (1) is assigned a buffer (5) in which the output digital current and voltage signals (J' , U') are first buffered consecutively; and
- a sensing arrangement (13) that detects tripping signals (S) from the respective protective circuit (6) is connected on the output side to the data processing system (1).

6. The arrangement according to Claim 5, characterized in that

- the buffer (5) has a sufficiently large storage capacity to buffer all current and voltage signals (J' , U') output during a tripping signal-free test period corresponding to the response time (Tls) of switches provided for interaction with the protective circuits (6) to be tested.

7. The arrangement according to Claim 5 or 6, characterized in that

- the buffer is a ring buffer (5).

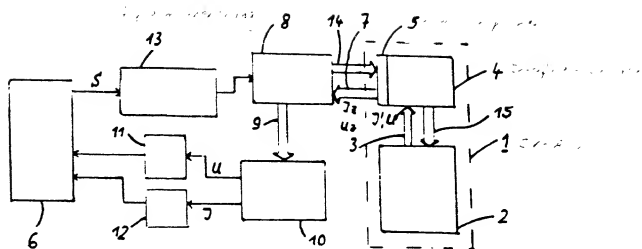


Fig 1

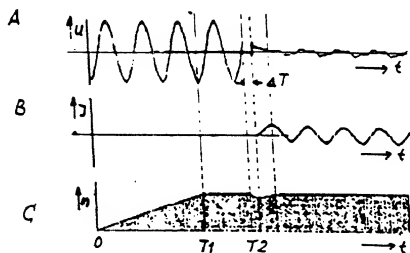


Fig 2

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND ARRANGEMENT FOR TESTING DIGITAL PROTECTIVE CIRCUITS**, the specification for which was filed in the United States Patent and Trademark Office on March 10, 2000, Serial No. 09/508,396.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

Number	Country filed	Day/month/year	Priority Claimed Under 35 USC 119
197 40 425.1	Fed. Rep. of Germany	10 September 1997	Yes

EL 244506391US

And I hereby appoint Richard L. Mayer (Reg. No. 22,490), Gerard A. Messina (Reg. No. 35,952) and Michelle Carniaux (Reg. No. 36,098) as my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Please address all communications regarding this application to:

KENYON & KENYON
One Broadway
New York, New York 10004



26646

PATENT TRADEMARK OFFICE

Please direct all telephone calls to Richard L. Mayer at (212) 425-7200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful and false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor:

1-00
Steffen KAISER

Inventor's Signature: Steffen Kaiser

Date: 08.07.01

Residence: Dimitroffstr. 123
10407 Berlin DEX
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

Inventor:

2-10

Wilhelm WINTER

Inventor's Signature:

W. Winter

Date:

4.2.21

Residence:

Eichenweg 10
91054 Erlangen *DEU*
Federal Republic of Germany

Citizenship:

Federal Republic of Germany

Post Office Address: Same as above.

287990